


DemoPro (GDP)



FEATURES

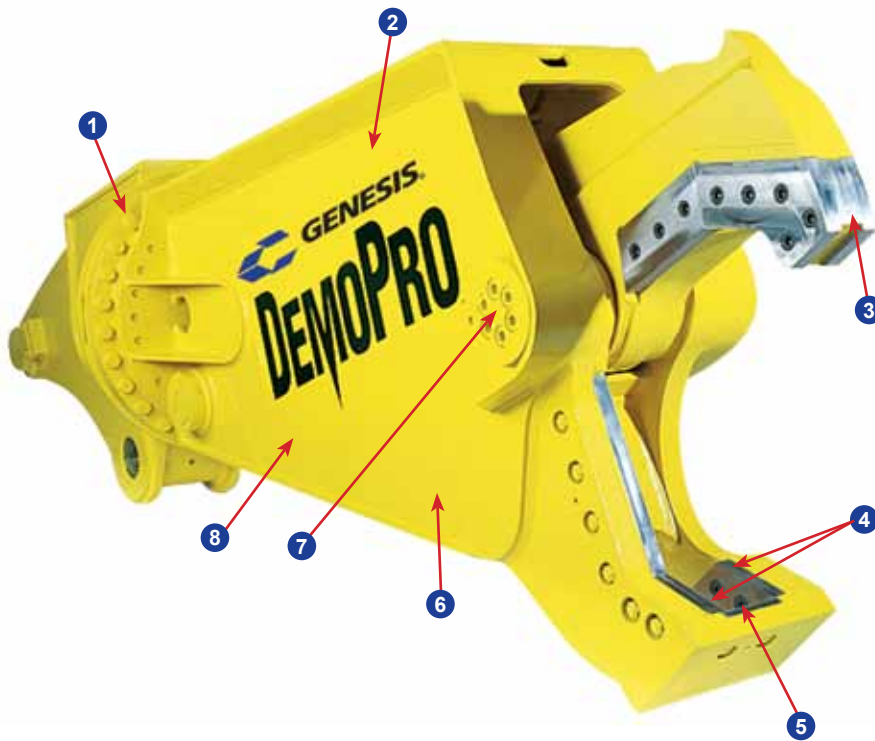

- 1 360° rotation is standard with every DemoPro
- 2 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 3 Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- 4 Exclusive dual guide blade system accommodates heat expansion at the tip while maintaining tighter tolerances where the primary cutting blades pass
- 5 Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges
- 6 Enclosed structure adds strength and rigidity while protecting the cylinder
- 7 Shrouded heavy-duty pivot design provides structural strength and long-term durability
- 8 Built with Weldox steel for the best combination of structural strength and wear durability

APPLICATIONS

- Demolition
- Bridge Dismantling and Processing
- Concrete Recycling



Metric Specs:

| Model Number | Weight | Jaw Opening | Jaw Depth | Shear Force at 5000 psi | Crushing/Piercing Force | Standard Length | Minimum Excavator Wt. | Minimum Excavator Wt. |
|--------------|--------|-------------|-----------|-------------------------|-------------------------|-----------------|-----------------------|-----------------------|
| | | | | At Throat (kN) | Fully Open (kN) | | Boom Mounted (mt) | Stick Mounted (mt) |
| GDP 450 | (kg) | (mm) | (mm) | 4,297 | 952 | (mm) | 11 | 20 |
| GDP 650 | 2,041 | 610 | 533 | 6,085 | 1,228 | 2,794 | 19 | 30 |
| GDP 900 | 3,447 | 711 | 635 | 8,247 | 1,432 | 3,403 | 30 | 44 |
| GDP 1200 | 5,216 | 965 | 914 | 9,964 | 1,530 | 4,267 | 39 | 54 |

Every Genesis DemoPro is covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance.