


Versi Pro 15 (GVP 15)

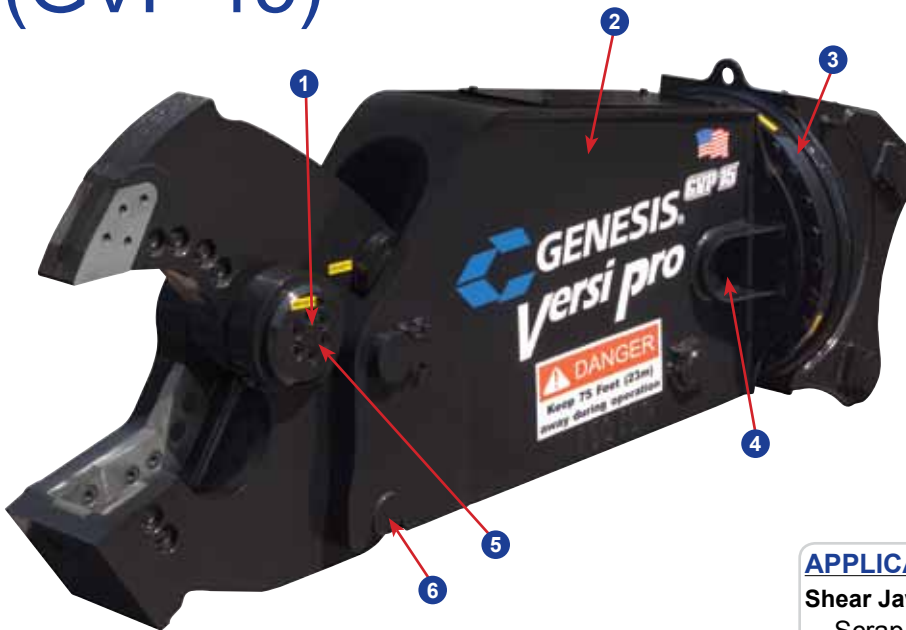

FEATURES

- 1 Patented pivot system provides a power curve to match each jaw set's primary application
- 2 Built with Weldom steel for the best combination of structural strength and wear durability
- 3 360° rotation comes standard with every Versi Pro
- 4 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 5 Each jaw's pivot group stays intact, allowing the use of a press-fit pin design for a stronger, more durable product and making jaw change-outs safe, easy and fast
- 6 Jaw change-outs in 10 minutes with the coupler-style connection system

APPLICATIONS

Shear Jaws


- Scrap Processing
- Demolition
- Rebar
- Wire
- Tires
- Many types of non-ferrous

Cracker Jaws

- Demolition
- Concrete Recycling
- C&D Processing

Shear Jaws

Cracker Jaws

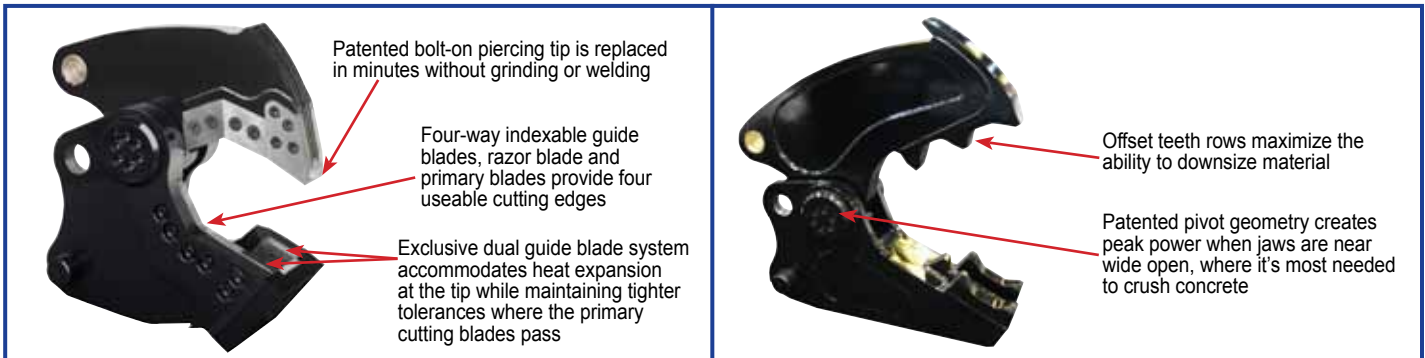

Metric Specs:

Jaws	Weight (kg)	Typical Reach* (mm)	Jaw Opening (mm)	Jaw Depth (mm)	Throat Force (kN)	Tip Force (kN)	Operating Pressure (bar)	Minimum Excavator Wt. 3 rd Member** (mt)
Shear	1,451	2,261	406	381	2,989	641	345	12
Cracker	1,451	2,515	635	635	-	534	345	12

*Typical reach with 3rd member head.

**The stability of each lift class varies between OEM excavator models. Please consult with your Genesis salesperson for recommended carrier models.

Every Genesis Versi Pro 15 is covered by a 12-month, 1,500-hour (whichever occurs first) warranty.

Genesis reserves the right to continually make product improvements designed to positively enhance performance.