


XP Mobile Shear (GXP)

FEATURES

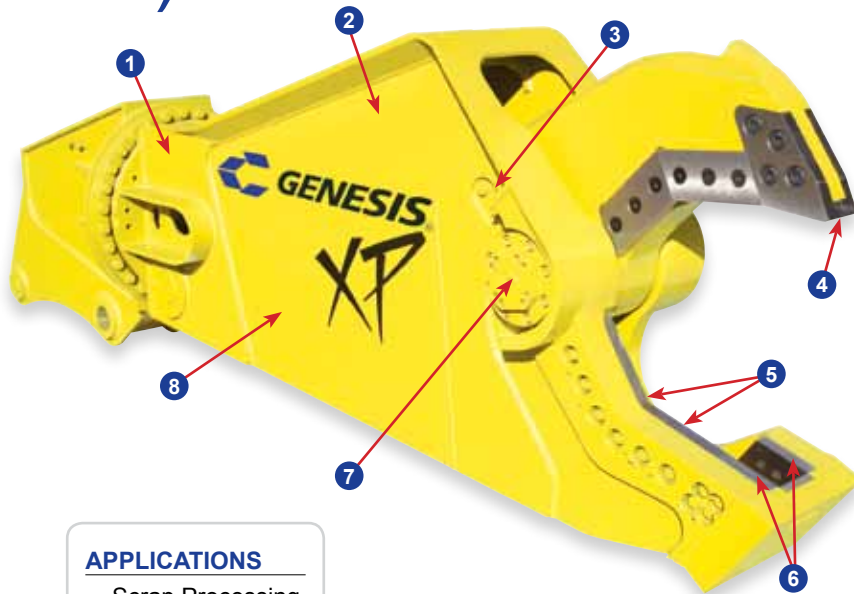

APPLICATIONS

- Scrap Processing
- Demolition

- 1 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 2 Enclosed structure adds strength and rigidity while protecting the cylinder
- 3 Exclusive easy to shim AutoGuide system helps maintain blade tolerances by off-setting jaw deflection
- 4 Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- 5 Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges
- 6 Exclusive dual guide blade system accommodates heat expansion at the tip while maintaining tighter tolerances where the primary and secondary cutting blades pass
- 7 Shrouded heavy-duty pivot design provides structural strength and long-term durability
- 8 Built with Weldox steel for the best combination of structural strength and wear durability

Metric Specs:

Model Number	Shear Weight (kg)	Jaw Opening (mm)	Jaw Depth (mm)	Shear Force at 345 bar (kN)	Shear Force at 380 bar (kN)	Typical Reach (mm)	Minimum Excavator Wt. Boom Mounted (mt)	Minimum Excavator Wt. Stick Mounted (mt)
* GXP 200	2,268	457	432	5,418	5,961	1,778	11	18
* GXP 200R	2,495	457	432	5,418	5,961	2,667	13	20
* GXP 300	3,493	584	610	7,117	7,829	2,134	16	22
* GXP 300R	3,674	584	610	7,117	7,829	3,099	20	30
GXP 400	3,992	711	737	8,719	9,590	2,438	20	34
GXP 400R	4,990	711	737	8,719	9,590	3,530	24	40
** GXP 440 MAXX	5,171	711	737	9,315	10,240	2,667	22	36
** GXP 440R MAXX	5,897	711	737	9,315	10,240	3,708	27	45
GXP 500	5,466	813	813	11,610	12,775	2,769	24	44
GXP 500R	6,055	813	813	11,610	12,775	3,784	30	49
** GXP 660 MAXX	6,214	813	813	13,122	14,457	3,048	27	45
** GXP 660R MAXX	7,031	813	813	13,122	14,457	4,115	34	54
GXP 700	6,260	889	889	12,989	14,288	3,048	31	49
GXP 700R	7,711	889	889	12,989	14,288	4,216	40	61
** GXP 990 MAXX	7,031	889	889	19,412	21,351	3,226	39	61
** GXP 990R MAXX	8,165	889	889	19,412	21,351	4,572	45	77
GXP 1000	6,804	965	965	15,569	17,126	3,277	40	63
GXP 1000R	8,391	965	965	15,569	17,126	4,597	45	77
GXP 1200	9,389	1,067	1,067	19,973	21,974	3,353	49	77
GXP 1200R	11,929	1,067	1,067	19,973	21,974	4,851	68	113
GXP 1500	10,750	1,118	1,118	23,042	25,346	3,505	54	86
GXP 1500R	13,381	1,118	1,118	23,042	25,346	5,004	72	113
GXP 2500	20,865	1,168	1,219	26,823	29,509	4,445	90	127
GXP 2500R	24,494	1,168	1,219	26,823	29,509	6,629	108	163

*GXP 200 and 300 series shears offer a single guide blade system.

**GXP MAXX models deliver extra shear power for heavy-duty processing. Extended reach brackets are available on all non-rotating shears.

All Genesis GXP "R" series shears feature continuous 360° rotation.

Genesis GXP shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance.



1000 Genesis Drive, Superior, WI 54880
888-SHEAR-IT (743-2748) - Tel: 715.395.5252 - Fax: 715.395.5255
genesisattachments.com - info@genesisattachments.com