

Rebar Shear (GRS)

POWER
Series


Mechanical design produces very fast cycle times

Built with Weldox and Hardox steel for the best combination of structural strength and wear durability

PALADIN
DEMOLITION AND RECYCLING

APPLICATIONS

- Rebar Processing
- C&D Recycling

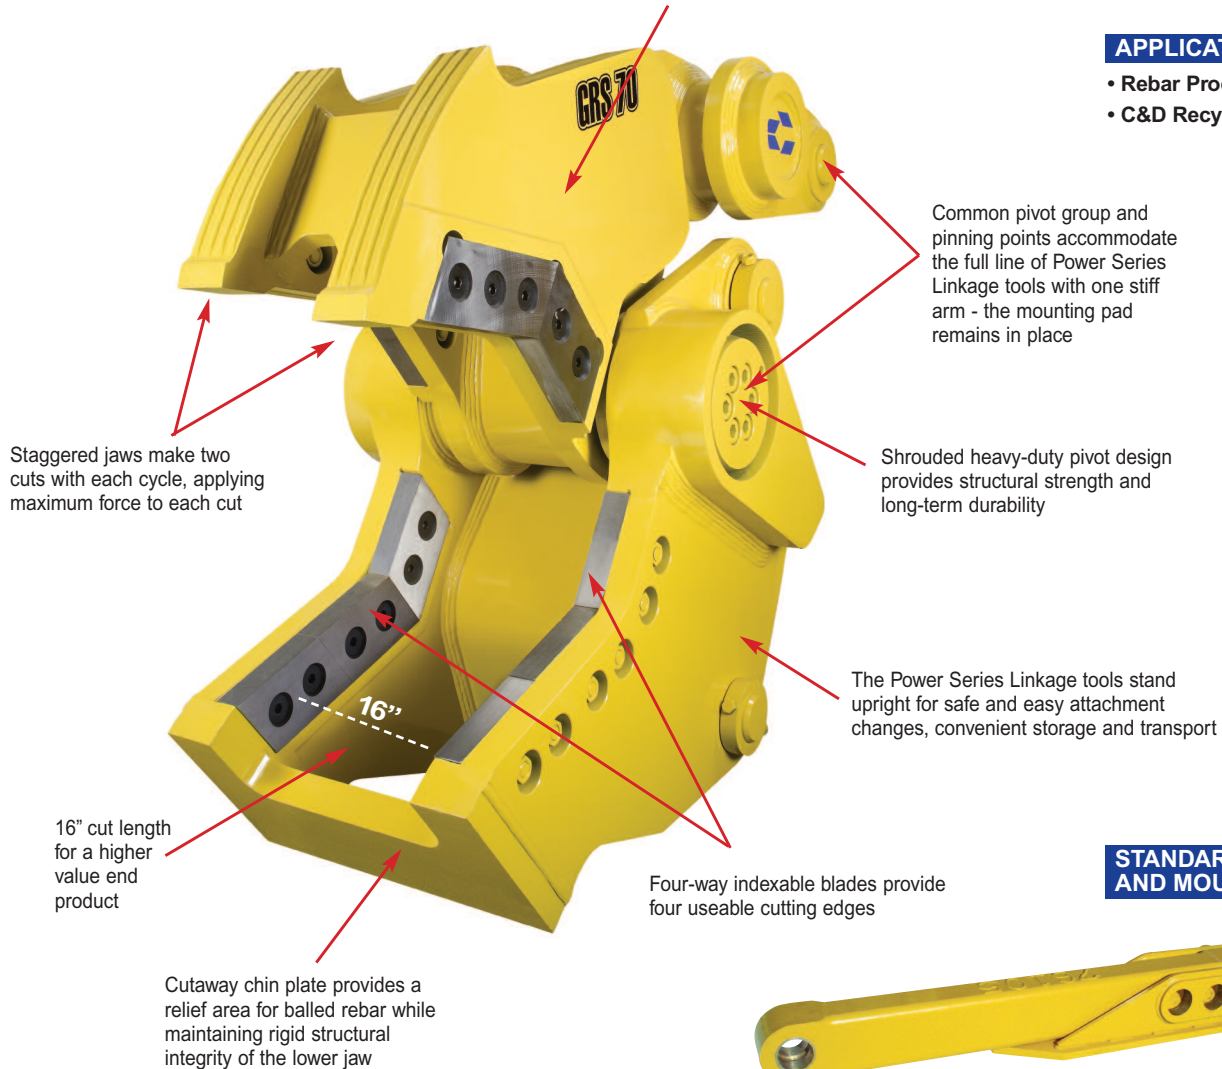

STANDARD STIFF ARM AND MOUNTING PAD



Model Number	Weight (lbs.)	Jaw Opening* (ins.)	Jaw Depth (ins.)	Excavator Weight (lbs.)
GRS 70	6,098	26	27	65 - 80,000
GRS 90	6,718	30	30	80 - 110,000

*Jaw opening varies slightly depending on excavator mounting location.

Genesis linkage attachments are not compatible with quick couplers. Contact Genesis for more information. All Genesis Rebar Shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance product performance.