

# Linkage Shear (GLS)

**POWER** Series




## FEATURES

- 1 Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges
- 2 Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- 3 Rhino horn aids in positioning material for processing
- 4 Common pivot group and pinning points accommodate the full line of Power Series linkage tools with one stiff arm - the mounting pad remains in place
- 5 Shrouded heavy-duty pivot design provides structural strength and long-term durability
- 6 Stiff arm and mounting pad included

## APPLICATIONS

- Scrap Processing
- Demolition
- C&D Processing
- Concrete Recycling

**SHEAR**  
**JAW ARMOR**  
COMPATIBLE

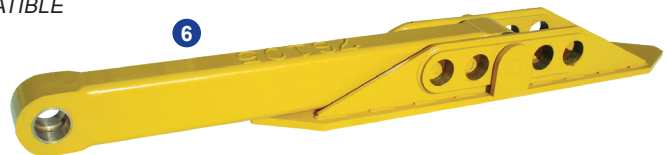

Model	Weight*	Jaw Opening**	Jaw Depth	Excavator Weight
	(lbs.)	(ins.)	(ins.)	(lbs.)
<b>GLS 50</b>	4,100	21	21	40,000 - 60,000
<b>GLS 70</b>	4,696	24	24	60,000 - 80,000
<b>GLS 90</b>	5,313	27	27	80,000 - 110,000

\*Weight includes mounting bracket and stiff arm.

\*\*Jaw opening varies slightly depending on excavator mounting location.

Genesis linkage attachments are not compatible with quick couplers. Contact Genesis for more information.

All Genesis Linkage Shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.

Genesis reserves the right to continually make product improvements designed to positively enhance performance.

Patents: [genesisattachments.com/products/patents](http://genesisattachments.com/products/patents)