


# DemoPro (GDP)

## FEATURES

- 1 Bolt-on tip blades fully encapsulate and protect the upper tang and are available in steel piercing or concrete processing configurations
- 2 Four-way indexable primary, guide, and razor blades provide four useable cutting edges
- 3 Cutting blades feature an apex to draw in material and provide superior cutting performance
- 4 Jaw geometry provides power at full-open, improving ability to process large objects
- 5 Short, flat-top head with bolt-on bracket makes it easy to change mounting for different carriers
- 6 Cylinder is reverse-mounted to protect from debris
- 7 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 8 Replaceable weld-on plates protect high-wear areas

## APPLICATIONS

- Demolition
- Bridge Dismantling and Processing
- Concrete Recycling

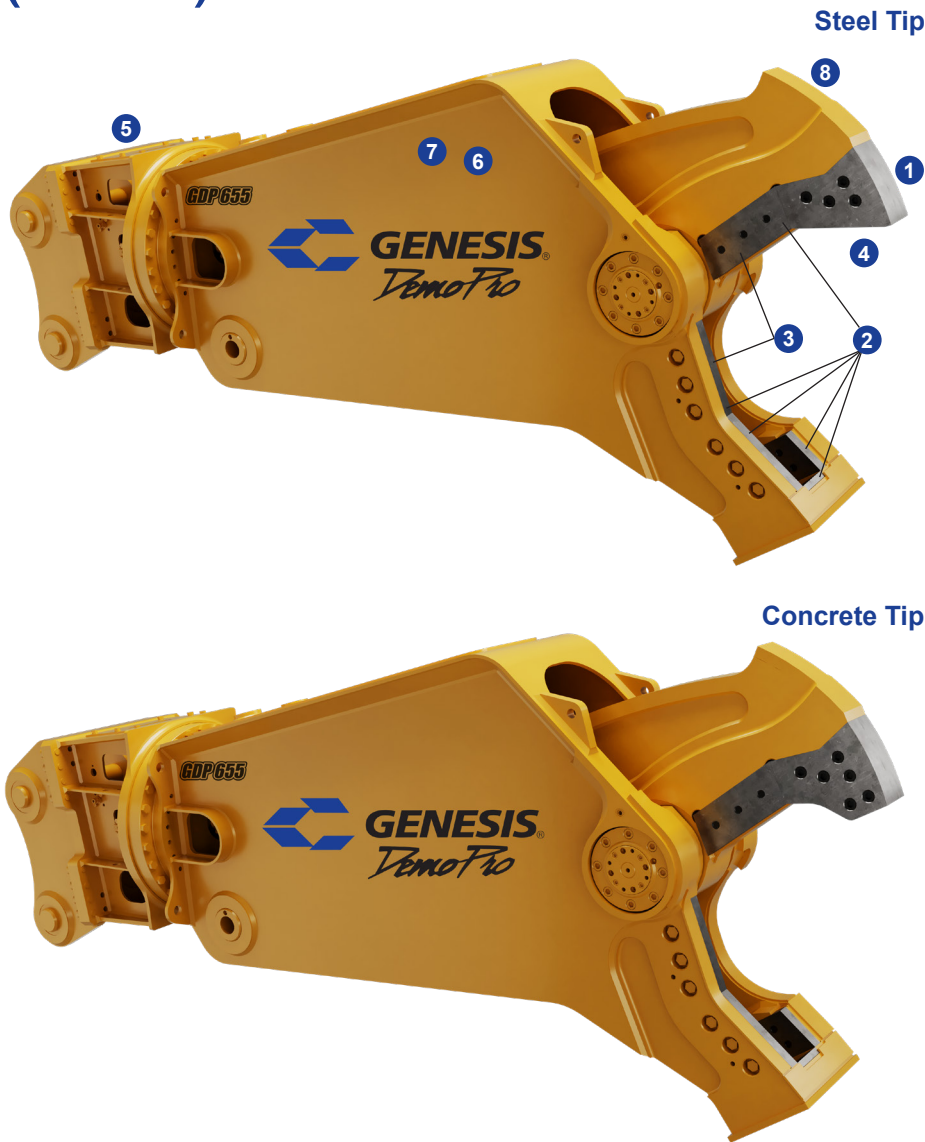

Model	Weight* (lbs.)	Jaw Opening		Jaw Depth (ins.)	Reach** (ft. ins.)	Minimum Excavator Wt. Stick Mount (lbs.)
		Steel (ins.)	Concrete (ins.)			
<b>GDP 655</b>	7,500	36	33	26	10' 4"	66,000

\*Weight includes mounting bracket to attach to excavator.

\*\*Distance is measured from the attachment mounting pivot (boom or stick) forward.

Every Genesis DemoPro is covered by a 12-month, 1,500-hour (whichever occurs first) warranty.

Genesis reserves the right to continually make product improvements designed to positively enhance performance.

Patents: [genesisattachments.com/patents](http://genesisattachments.com/patents)



1000 Genesis Drive, Superior, WI 54880  
888-SHEAR-IT (743-2748) – Tel: 715.395.5252 – [genesisattachments.com](http://genesisattachments.com)