


Subsea Shear (GSS)

FEATURES

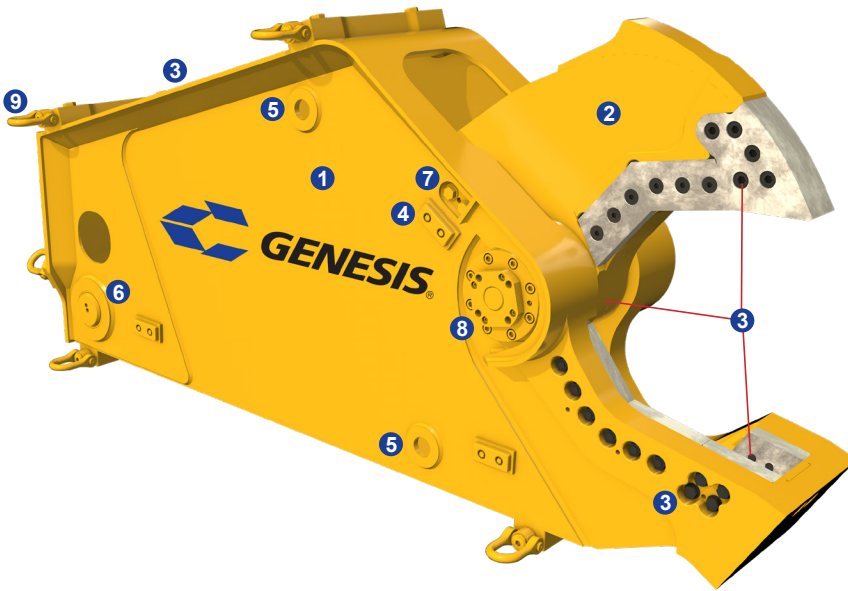

- 1 Pressure tested to operate at depths down to 10,000 feet
- 2 Anti-corrosion primer and paint for supreme protection in harsh marine environments
- 3 EcoGuard anti-corrosion coated fasteners and critical surfaces
- 4 Zinc anodes for galvanic corrosion protection
- 5 Drain holes in the side and bottom plates
- 6 Additional bearings and grease points at the cylinder ends simplify maintenance and disassembly
- 7 Exclusive easy to shim AutoGuide system helps maintain blade tolerances by off-setting jaw deflection
- 8 Heavy-duty pivot design protected by an anti-corrosion coating provides structural strength and long-term durability
- 9 Multi-position rigging to hang and operate while suspended by a cable crane

APPLICATIONS

- Offshore Platform Decommissioning
- Offshore Pipeline and Piling Cutting
- Underwater Steel Cutting
- Cable Hung - Operated by Subsea Power Pack or from Surface Power

Metric Specs:

Model	Weight	Jaw Opening	Jaw Depth
	(kg)	(mm)	(mm)
GSS 665	5,579	813	813
GSS 775	6,668	889	940
GSS 1555	10,342	1,118	1,168
GSS 2555	20,865	1,372	1,422

Genesis GSS shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance. Patents: genesisattachments.com/patents