


XT Mobile Shear (GXT)

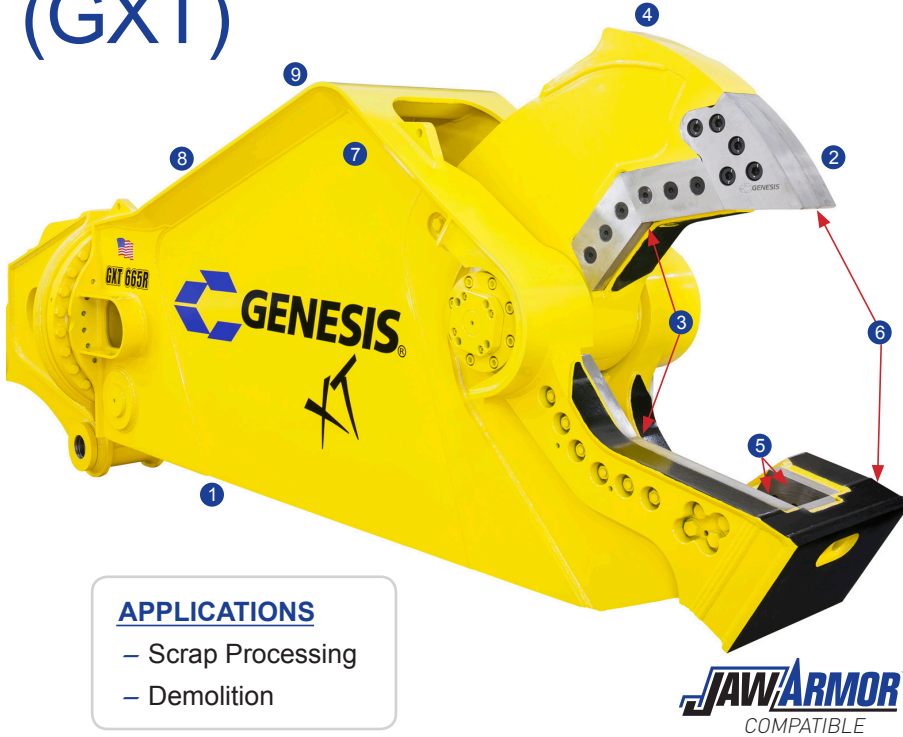

APPLICATIONS

- Scrap Processing
- Demolition

FEATURES

- 1 All the power in a shorter, lighter shear with a center of gravity closer to the excavator. Most models mount on smaller size carriers for lower initial investment and hourly operating costs.
- 2 Bolt-on piercing tip encapsulates front of upper jaw, minimizing risk of damage while reducing welding build-up and downtime
- 3 Short primary cutting blades position apex closer to the rear of the jaws and draw material further into the jaws where higher force makes efficient cuts
- 4 Weld-on, replaceable, highly abrasion-resistant steel rhino horn protects front of upper jaw, reducing downtime and welding build-up
- 5 Dual guide blade length matches piercing tip length enabling blades to be shimmed independently to accommodate piercing tip wear
- 6 Improved jaw geometry makes it easier to pick up material and reduces wear from ground contact
- 7 Reverse-mounted hydraulic cylinder shortens shear length and weight while protecting rod from damage
- 8 Remote-mounted hydraulic speed valve improves serviceability and minimizes stress on other critical hydraulic components
- 9 Lower shear height improves visibility while providing superior rigidity and structural integrity

| Model | Weight* (lbs.) | Jaw Opening (ins.) | Jaw Depth (ins.) | Reach** (ft. ins.) | Min. Excavator Wt. Boom Mount*** (lbs.) | Min. Excavator Wt. Stick Mount*** (lbs.) |
|--------------|-------------------|-----------------------|---------------------|-----------------------|--|---|
| GXT 115**** | 3,100 | 16 | 18 | 5' 0" | 15,000 | 25,000 |
| GXT 115R**** | 3,550 | 16 | 18 | 7' 8" | 18,000 | 30,000 |
| GXT 225 | 4,200 | 18 | 20 | 5' 8" | 25,000 | 35,000 |
| GXT 225R | 4,900 | 18 | 20 | 7' 11" | 30,000 | 45,000 |
| GXT 335 | 6,500 | 23 | 26 | 6' 5" | 27,000 | 45,000 |
| GXT 335R | 7,300 | 23 | 26 | 8' 11" | 37,000 | 66,000 |
| GXT 445 | 9,500 | 28 | 28 | 7' 2" | 40,000 | 75,000 |
| GXT 445R | 11,000 | 28 | 28 | 10' 1" | 48,000 | 90,000 |
| GXT 555 | 11,600 | 30 | 30 | 8' 0" | 50,000 | 90,000 |
| GXT 555R | 13,100 | 30 | 30 | 11' 0" | 55,000 | 110,000 |
| GXT 665 | 13,200 | 32 | 32 | 9' 0" | 55,000 | 110,000 |
| GXT 665R | 14,700 | 32 | 32 | 12' 0" | 68,000 | 120,000 |
| GXT 775 | 15,500 | 35 | 37 | 9' 8" | 68,000 | 135,000 |
| GXT 775R | 17,750 | 35 | 37 | 13' 0" | 79,000 | 150,000 |
| GXT 995 | 18,000 | 39 | 42 | 10' 8" | 79,000 | 170,000 |
| GXT 995R | 20,000 | 39 | 42 | 14' 2" | 100,000 | 180,000 |
| GXT 1555 | 23,000 | 44 | 46 | 13' 5" | 110,000 | 190,000 |
| GXT 1555R | 26,750 | 44 | 46 | 17' 2" | 145,000 | 250,000 |
| GXT 2055 | 32,000 | 48 | 50 | 14' 5" | 145,000 | Contact Factory |
| GXT 2055R | 36,200 | 48 | 50 | 17' 7" | 180,000 | Contact Factory |
| GXT 2555 | 50,500 | 54 | 56 | 15' 5" | Contact Factory | Contact Factory |
| GXT 2555R | 56,500 | 54 | 56 | 21' 5" | Contact Factory | Contact Factory |

*Weight includes mounting bracket to attach to excavator. **Distance is measured from the attachment mounting pivot (boom or stick) forward.
 ***2nd-member installations that are at or near minimum excavator weight and all 3rd-member installations require pre-approval from Genesis.
 ****The GXT 115 and GXT 115R have a single guide blade. GXT shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.
 Genesis reserves the right to continually make product improvements designed to positively enhance performance.
 Patents: genesisattachments.com/patents