


# XT Mobile Shear (GXT)

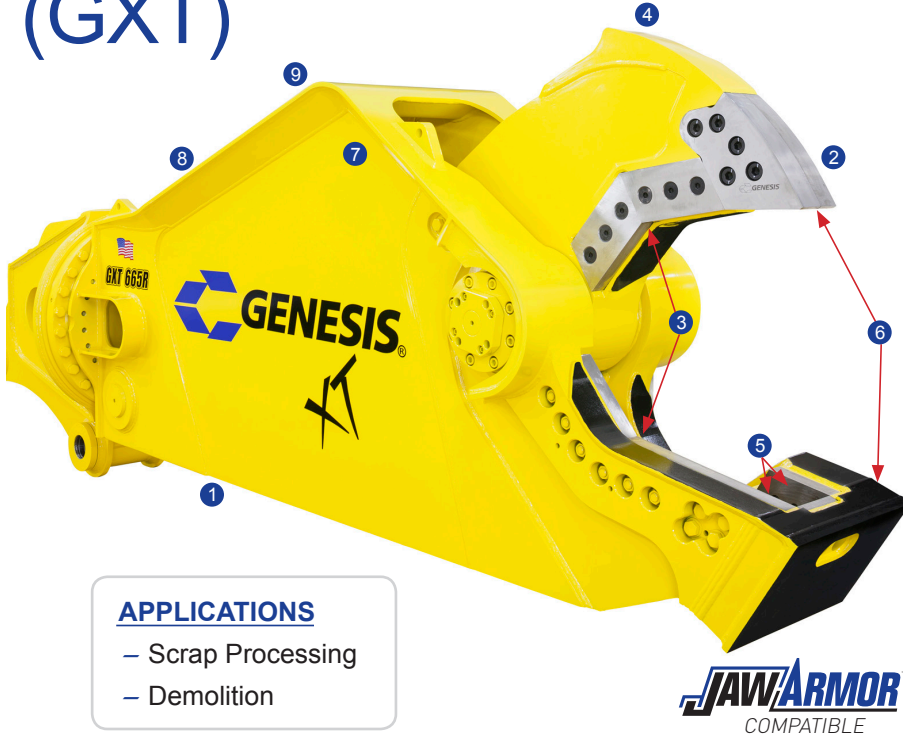

## APPLICATIONS

- Scrap Processing
- Demolition

## FEATURES

- 1 All the power in a shorter, lighter shear with a center of gravity closer to the excavator. Most models mount on smaller size carriers for lower initial investment and hourly operating costs.
- 2 Bolt-on piercing tip encapsulates front of upper jaw, minimizing risk of damage while reducing welding build-up and downtime
- 3 Short primary cutting blades position apex closer to the rear of the jaws and draw material further into the jaws where higher force makes efficient cuts
- 4 Weld-on, replaceable, highly abrasion-resistant steel rhino horn protects front of upper jaw, reducing downtime and welding build-up
- 5 Dual guide blade length matches piercing tip length enabling blades to be shimmed independently to accommodate piercing tip wear
- 6 Improved jaw geometry makes it easier to pick up material and reduces wear from ground contact
- 7 Reverse-mounted hydraulic cylinder shortens shear length and weight while protecting rod from damage
- 8 Remote-mounted hydraulic speed valve improves serviceability and minimizes stress on other critical hydraulic components
- 9 Lower shear height improves visibility while providing superior rigidity and structural integrity

Model	Weight* (lbs.)	Jaw Opening (ins.)	Jaw Depth (ins.)	Reach** (ft. ins.)	Min. Excavator Wt. Boom Mount*** (lbs.)	Min. Excavator Wt. Stick Mount*** (lbs.)
GXT 115****	3,100	16	18	5' 0"	15,000	25,000
GXT 115R****	3,550	16	18	7' 8"	18,000	30,000
GXT 225	4,200	18	20	5' 8"	25,000	35,000
GXT 225R	4,900	18	20	7' 11"	30,000	45,000
GXT 335	6,500	23	26	6' 5"	27,000	45,000
GXT 335R	7,300	23	26	8' 11"	37,000	66,000
GXT 445	9,500	28	28	7' 2"	40,000	75,000
GXT 445R	11,000	28	28	10' 1"	48,000	90,000
GXT 555	11,600	30	30	8' 0"	50,000	90,000
GXT 555R	13,100	30	30	11' 0"	55,000	110,000
GXT 665	13,200	32	32	9' 0"	55,000	110,000
GXT 665R	14,700	32	32	12' 0"	68,000	120,000
GXT 775	15,500	35	37	9' 8"	68,000	135,000
GXT 775R	17,750	35	37	13' 0"	79,000	150,000
GXT 995	18,000	39	42	10' 8"	79,000	170,000
GXT 995R	20,000	39	42	14' 2"	100,000	180,000
GXT 1555	23,000	44	46	13' 5"	110,000	190,000
GXT 1555R	26,750	44	46	17' 2"	145,000	250,000
GXT 2055	32,000	48	50	14' 5"	145,000	Contact Factory
GXT 2055R	36,200	48	50	17' 7"	180,000	Contact Factory
GXT 2555	50,500	54	56	15' 5"	Contact Factory	Contact Factory
GXT 2555R	56,500	54	56	21' 5"	Contact Factory	Contact Factory

\*Weight includes mounting bracket to attach to excavator. \*\*Distance is measured from the attachment mounting pivot (boom or stick) forward.  
 \*\*\*2<sup>nd</sup>-member installations that are at or near minimum excavator weight and all 3<sup>rd</sup>-member installations require pre-approval from Genesis.  
 \*\*\*\*The GXT 115 and GXT 115R have a single guide blade. GXT shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.  
 Genesis reserves the right to continually make product improvements designed to positively enhance performance.  
 Patents: genesisattachments.com/patents